1008-7409-4519-5352

TEST REPORT

1. NO : CT19-034829E
2. Client
   - ○ Name : H&T KOREA
   - ○ Address : 54-1, Jingeononam-ro 884beon-gil, Onam-eup, Namyangju-si, Gyeonggi-do, Korea
3. Date of Test : 2019.03.18 ~ 2020.06.24
4. Use of Report : Quality Control
5. Test Sample : Auto door(HT-S9000)
6. Test Method
   (1) KS F 3120 : 2018
7. Test Results

1) 1

Test Item(s)	Unit	Test Method	Test Results	Remark	Loc.
durability(5 000 000 time)	-	(1)	pass	-	A

※ Location
A : 13-1, Masan-ri, Papyeong-myeon, Paju-si, Gyeonggi-do, Korea

Affirmation	Tested By Name : Pyeong Ryeon Kim Kim	Technical Manager Name : Won, Chul Hyun

This report is not accredited by KOLAS.
Our report apply only to the standards or procedures identified and to the sample(s) tested unless otherwise specified. The test results are not indicative of representative of the qualities of the qualities of the lot from which the sample was taken or of apparently identical or similar products. The results of using only a portion of this report cannot be guaranteed. The authenticity of this test report can be checked on KCL website(www.kcl.re.kr).

2020.06.24

Korea Conformity Laboratories President Yoon, Kap Seok Yoon, Kapseok

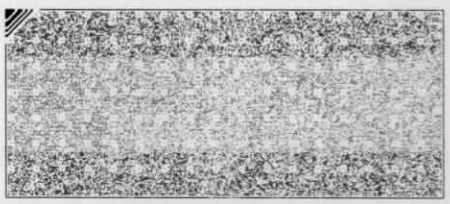
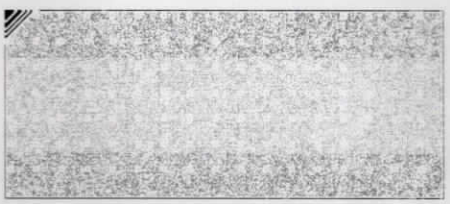

TEST REPORT

NO : CT19-034829E

※ List of Test Specimen Composition

Constituent		Material / Specification	Model Name	Manufacture
Machine Equipments	Cover, Operator Box, Cover Bracket	STS304 1.2mm H/L	-	POSCO
	Motor	DC24 V, 60W	DGO-6024 MGA	SPG
	Controller	Micro Process Type, Power Type : SMPS	HT-S9000	H&T KOREA
	End Pulley	4mm Steel	-	H&T KOREA
	Belt	S8M 12W	-	INTERCONTINENTAL
	Hanger	Acetal / 4mm Steel	-	H&T KOREA
Door Frame	Stainless Frame	STS 304 1.2mm H/L	-	POSCO
Door	Horizontal Bar	Material : STS304 / 800*55*30mm	-	POSCO
	Belt Clip	Alluminium die casting	-	TAESUNG
	Glass	12mm Tempered Glass	-	KOREA GLASS
Interlocking device	Interlocking device	Hanger Type	-	TAESUNG
	Belt Clip	Material: Alluminium die casting	-	DAEHUENG Technology
	Belt	Rubber S8M * 11mm	-	INTERCONTINENTAL

* Glass door size : 800 x 2 000 ㎜
* Moving distance : 660 ㎜
* Glass door Weight : 46 kg
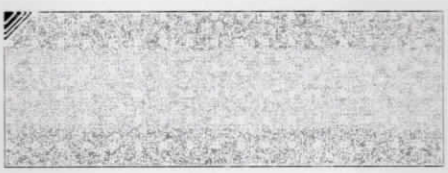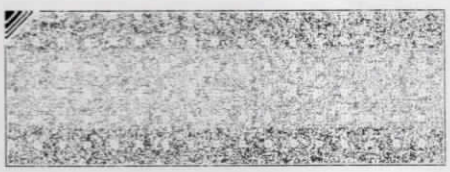
---- End of Report----